



MIGHTY LUBE® CLEANING BRUSHES

For I-Beam Conveyors

INCLUDED IN THIS PACKAGE



I-Beam Conveyor Chain Cleaner Brush Assembly for 3", 4" or 6" I-Beam

- Cleans chain and trolleys
- Removes debris and reduces rejects without contaminating parts
- Adjusts to contact hard to reach points
- Spring loaded to prevent jamming if a hanger passes at an odd angle

MODEL #300-I - For Three Inch I-Beam Conveyor

MODEL #400-I - For Four Inch I-Beam Conveyor

MODEL #600-I - For Six Inch I-Beam Conveyor

** Standard assembly includes crimped carbon steel brushes. Assemblies with Carbide Impregnated Nylon brushes are also available.*

ALSO AVAILABLE:



Beam Sweep

- Cleans the web surfaces of the rail
- Reduces debris fall out and improves grounding contact
- Easily installed and removed

MODEL #3-91BC
For Three Inch I-Beam

MODEL #4-91BC
For Four Inch I-Beam

MODEL #6-91BC
For Six Inch I-Beam

Yoke Cleaning Brush

- Removes buildup from hard to reach, often overlooked sources of contamination
- Mounting block welds to the bottom of the rail
- Brush is easily replaced



MODEL #30Y
For Three Inch I-Beam

MODEL #40Y
For Four Inch I-Beam



MIGHTY LUBE®
Systematic Lubrication, Inc.

9569 W 40TH ST • FREMONT, MI 49412 | PHONE 231-924-6160

WWW.MIGHTYLUBE.COM



300-I/400-I/600-I CHAIN CLEANER INSTRUCTIONS



MODEL #300-I/400-I/600-I

STAINLESS STEEL REPLACEMENT BRUSHES


#75RB (20)

** Standard assembly includes crimped carbon steel brushes.*

Assemblies with Carbide Impregnated Nylon brushes are also available (Part #'s 300-INB/400-INB/600-INB).

Carbide Impregnated Nylon replacement brushes are Part # 75NRB

**Shown Installed on Rail*

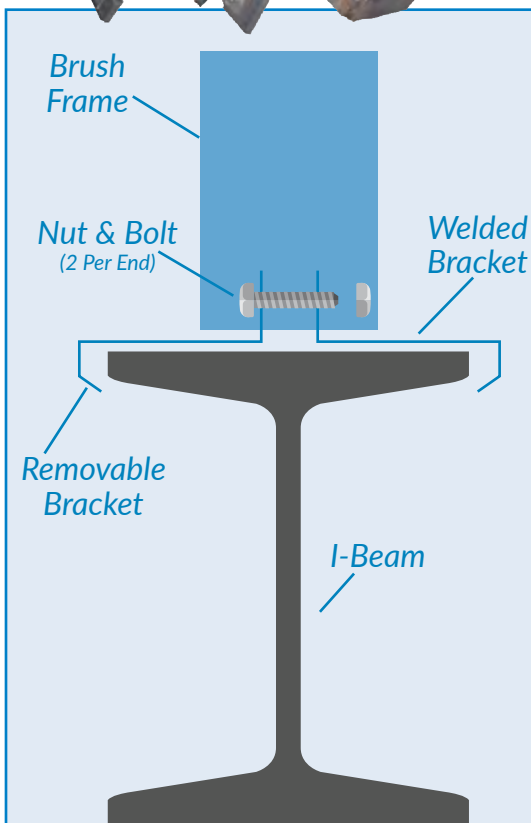

INSTALLATION

Complete assemblies are shipped with brushes pre-assembled

- *Place brush cleaner over i-beam and lower completely onto top of track.*
- *Be sure that welded brackets are attached to upper i-beam flange.*
- *Position removable bracket on opposite side of rail and attach to welded bracket with nuts and bolts provided.*
- *Adjust brush mechanism as necessary for particular application.*

To Replace Brushes:

- *Loosen nuts and bolts holding old brushes*
- *Remove old brushes*
- *Insert new brushes into brush channels*
- *Tighten nuts and bolts to secure new brushes*



MIGHTY LUBE[®]
Systematic Lubrication, Inc.

9569 W 40TH ST • FREMONT, MI 49412 | PHONE 231-924-6160

WWW.MIGHTYLUBE.COM